

Gas booster blower  
**FC-2030G**



Pressure Type

Built-in use


\*No power plug included because it is designed for built-in use.

\*Rubber-made legs are sharp-pointed. Not for self-standing installation.

Applications

- Fuel cell system

Dimensions

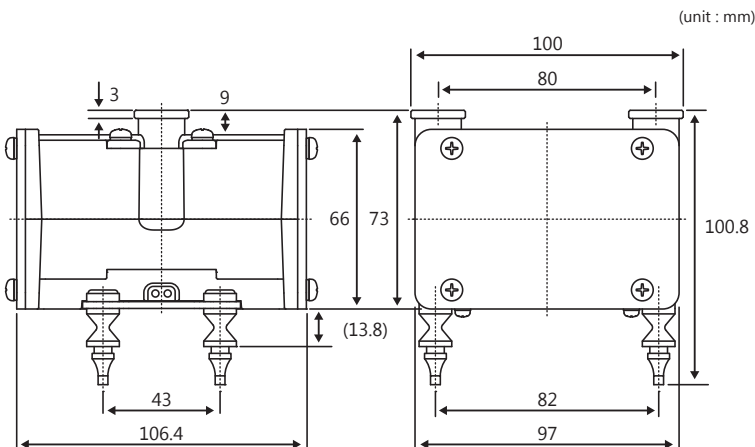



Specifications

Fluid	City gas, LPG	
Rated voltage	AC17V	
Frequency	60Hz	
	<PRESSURE>	<AIRFLOW>
Rated operating cond.	15kPa (150mbar)	4.0NL/min
Max operating cond.	25kPa (250mbar)	5.5NL/min
Min operating cond.	5kPa (50mbar)	0.4NL/min
Power consumption	4.0W <sup>(*1)</sup>	
Noise level	33dBA or less <sup>(*1)</sup>	
Size	0.82L <sup>(*2)</sup>	
Weight	1.42kg <sup>(*2)</sup>	
Gas sealing	0.3mL/min or less (@20kPa)	

\*1: Without AIRTRONICS control driver.

\*2: With AIRTRONICS control driver.

Performance Curve

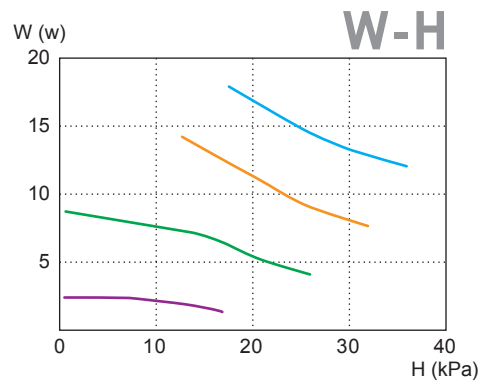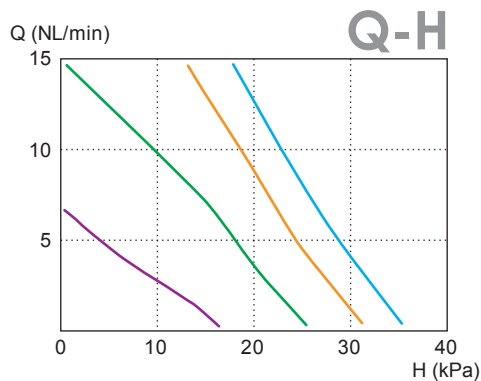

Control voltage

- 5V
- 4V
- 3V
- 2V

\* Performance curves mentioned above are reference values by operation with Airtronics control driver.

\* All characteristics values are only for reference, and are not guaranteed values.  
\* Note that the operating temperature for our pumps is 41°F(5°C) to 104°F(40°C).